

Steripower GmbH & Co KG


Schiffbauweg 1
D - 82319 Starnberg / Germany

Phone: +49 (0)8151 / 5 55 15 - 15
Fax: +49 (0)8151 / 5 55 15 - 11

Internet: www.steripower.com
eMail: info@steripower.com



Distribution partner::

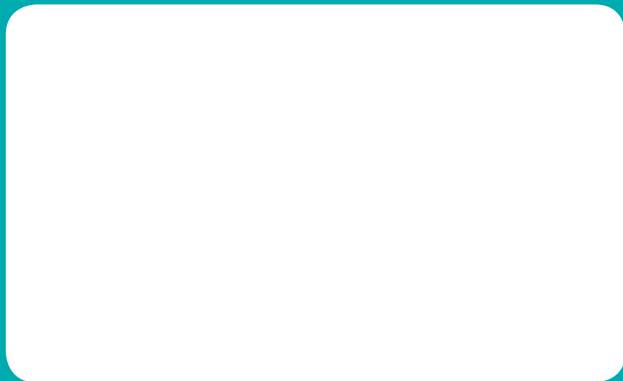

Desinfection in perfection 2.1

the touchless hand disinfection unit

Mains or rechargeable battery operated

thereby flexible positioning
standby time depends on
usage rate. Optical signal
before power shut down

Optional: power supply unit

Sensor

the sensor releases one
application with the speci-
fic dosage

Wide opening

for touchless disinfection
of both hands at the same
time. Excess liquid cannot
harm floor or working sur-
faces.

Optional: Counter

Digital counter for monitoring
dosage as well as amount of
application

No maintenance

Steripower®
white edition

Signalling

Optional connection
e.g. automatic door
opener, rotary spray or
others access control

Dosage

Application specific
dosage setting
in 10 levels from
0,5 ml to 5 ml.

Compatibility

Works with all known
disinfection liquids
(0,5 & 1,0 litre containers).

Spraying

Covers both hands
equally with disinfection
liquid.

Collecting dish

With absorbing pad.
Excess liquid will be
captured and enclosed.

DIN charging connection

to connect to the mains
with enclosed charger.
(item number 10041)

Optional: **NEW** LED-Lights

Dimensions

dimensions (ca.):
height 505 mm
width 290 mm
depth 200 mm

Steripower®

www.steripower.com